



System Scaffolds & Debris Chute Manufacturers

www.fectumglobal.com



About Us

Fectum Global Industries has emerged as a prominent Exporter and Supplier of System Scaffolding, Shoring, Formwork and Debris Chutes. Our offered products have gained much acceptance in the market for their resilient design, excellent finishing, dimensional accuracy and long functional life. We continue to bring the latest state-of-art technological improvement through the regular analysis of critical aspects of manufacturing process with the approach of quality improvement. All our products are manufactured from the quality tested raw material and cutting-edge technology as per the industry set norms. The manufacturing is supported by latest fully automatic machines. Furthermore, our competitive price policy has provided us huge client base to serve. We are exporting our quality products in USA, Canada, Europe, Australia and Africa countries.

FGI is driven to ensure complete customer satisfaction, every time, and maintain a company culture that encourages customer satisfaction

- ANSI & CAN certified and Tested Raw materials
- To minimise Rejection, Re-work and Wastes
- Inbuilt with Latest technology and solutions
- Skilled Teams and well organized work environmental
- Our system scaffolds tubes are all high strength tubes having S355 grade having min 50,000 PSI yield.

Ring Lock system

Ring Lock system is a modular system scaffold which can be used for all forms of access and support structures in the building and construction industries, ship building, offshore construction and industrial maintenance. Ringlock system is consistute of standard, ledger, brace, base jack and other components.

Main Components of Ringlock Support System



Product Name	Item Code	Description	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Ringlock Vertical	RLS-VS-16-H	Standard (1 Ring)	0.50	1.6	3.0	6.8
	RLS-VS-33-H	Standard (2 Ring)	1.00	3.3	5.4	11.9
	RLS-VS-49-H	Standard (3 Ring)	1.50	4.9	7.6	16.7
	RLS-VS-66-H	Standard (4 Ring)	2.00	6.6	10.0	22.0
	RLS-VS-82-H	Standard (5 Ring)	2.50	8.2	13.0	28.7
	RLS-VS-98-H	Standard (6 Ring)	3.00	9.8	14.9	32.8



Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Ringlock Ledger	RLS-HL-20-H	0.60	2.0	2.82	6.22
	RLS-HL-30-H	0.91	3.0	3.98	8.78
	RLS-HL-40-H	1.22	4.0	5.14	11.33
	RLS-HL-50-H	1.52	5.0	6.30	13.87
	RLS-HL-52-H	1.58	5.2	6.45	14.22
	RLS-HL-60-H	1.83	6.0	7.44	16.40
	RLS-HL-70-H	2.13	7.0	8.59	18.93
	RLS-HL-80-H	2.43	8.0	9.72	21.44
	RLS-HL-90-H	2.74	9.0	10.89	24.00
	RLS-HL-100-H	3.04	10.0	12.04	26.56



Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Ringlock Brace	RLS-DV-40-H	1.2 x 2.0	4.0 x 6.6	3.6	8.0
	RLS-DV-50-H	1.5 x 2.0	5.0 x 6.6	4.0	9.0
	RLS-DV-52-H	1.6 x 2.0	5.2 x 6.6	4.1	9.0
	RLS-DV-70-H	2.1 x 2.0	7.0 x 6.6	4.8	10.5
	RLS-DV-80-H	2.4 x 2.0	8.0 x 6.6	5.2	11.5
	RLS-DV-100-H	3.0 x 2.0	10.0 x 6.6	5.9	13.0

Ring Lock system



Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Base Coller	RLS-BC-10-H	0.3	1.0	2.1	0.57



Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Double Ledger	RLS-DL-46-H	1.40	4.6	12.10	26.67
	RLS-DL-50-H	1.52	5.0	11.55	25.46
	RLS-DL-51-H	1.57	5.1	12.01	26.48
	RLS-DL-53-H	1.62	5.3	12.65	27.89
	RLS-DL-60-H	1.83	6.0	13.70	30.20
	RLS-DL-68-H	2.07	6.8	13.75	30.31
	RLS-DL-70-H	2.13	7.0	16.01	35.30
	RLS-DL-80-H	2.44	8.0	18.10	39.90
	RLS-DL-84-H	2.57	8.4	19.11	42.13
	RLS-DL-90-H	2.74	9.0	20.45	45.08
RLS-DL-100-H	3.05	10.0	23.32	51.41	



Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Board Bracket	RLS-BB-12-H	3.66	12.0	4.23	9.33
	RLS-BB-24-H	7.31	24.0	6.50	14.33
	RLD-BB-36-H	10.97	36.0	8.55	18.78

RINGLOCK ACCESSORIES



BRACE END



LEDGER END



ROSETTE



WEDGE/ PIN



SPIGOT



Debris Chute

Solutions for construction & Industry



Top Hopper Section

Product Description :
Dia : 36"
Height : 4 feet
Thickness : 6 mm
Material : PE-500




Top Hopper Section-Flat



Regular Section

Product Description :
Dia : 36"
Height : 4 feet
Thickness : 6 mm
Material : PE-500

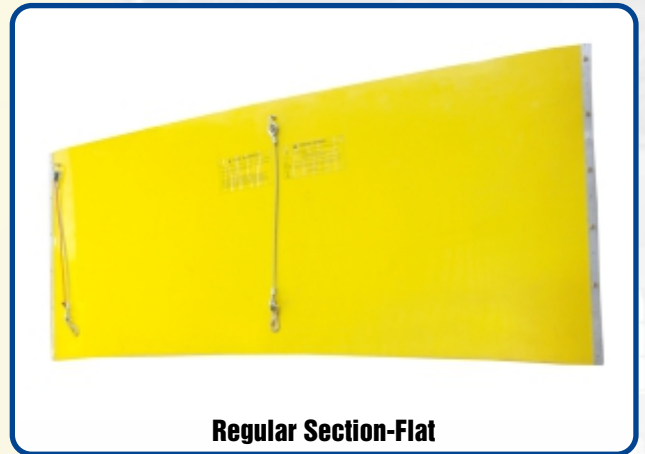

Regular Section-Flat



Door Section

Product Description :
Dia : 36"
Height : 4 feet
Thickness : 6 mm
Material : PE-500



Door Section-Flat

WRAP AROUND SECTION



Debris Chute



INFORMATION FOR THE WRAPROUND DESIGN CHUTE :

- All Chutes are equipped with safe and strong cable linking hardware.
- Light and Flexible.
- Ideal for roofers, masons, scaffolders, contractors, rental stores & supply houses.

BENEFITS OF THE WRAPAROUND DESIGN CHUTE:

- Minimum Storage Space for handling.
- Regular & Door Section connected by Eye-Bolts and secured with rope.
- All connection are connected with tested cable.
- Fully Compatible with all welded chute sections.
- All Section are easy to install & dismantle.
- Easy to handling.





Cup Lock

system

CUP LOCK SYSTEM unique node point collection allows up to four horizontal members to be connected to a vertical member in one single action without the use of nuts and bolts or wedges. The locking device is formed by two cups, a fixed lower cup which is welded to the vertical component at pre-located intervals and a sliding upper cups. The forged blade ends of the horizontal components are located into the lower cup, the upper cup is moved down and rotated to secure the components in place and then a hammer blow results in a positive and rigid connection.

Main Components of Cuplock Support System



Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Cuplock Vertical	CL-VS-16-H	0.50	1.6	2.51	5.53
	CL-VS-33-H	1.00	3.3	5.00	11.02
	CL-VS-50-H	1.50	5.0	7.50	16.53
	CL-VS-66-H	2.00	6.6	10.00	22.05
	CL-VS-82-H	2.50	8.2	12.49	27.54
	CL-VS-98-H	3.00	9.8	15.00	33.07



Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Cuplock Transom	CL-T-40-H	1.20	4.0	6.26	13.80
	CL-T-43-H	1.30	4.3	6.62	14.59
	CL-T-60-H	1.80	6.0	8.39	18.50
	CL-T-82-H	2.50	8.2	10.88	23.98



Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Cuplock ledger	CL-HL-16-H	0.50	1.6	2.01	4.43
	CL-HL-23-H	0.70	2.3	2.73	6.02
	CL-HL-33-H	1.00	3.3	3.74	8.25
	CL-HL-50-H	1.50	5.0	5.53	12.19
	CL-HL-60-H	1.80	6.0	6.61	14.57
	CL-HL-82-H	2.50	8.2	9.47	20.88
	CL-HL-98-H	3.00	9.8	11.27	24.85



Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Board Bracket	CL-BB-13-H	0.40	1.3	4.51	9.94
	CL-BB-22-H	0.66	2.2	6.35	14.00
	CL-BB-29-H	0.88	2.9	7.78	17.15



Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Cuplock Brace	CL-DB-35-H	1.07 x 2.0	3.5 x 6.6	6.87	15.15
	CL-DB-50-H	1.52 x 2.0	5.6 x 6.6	7.52	16.58
	CL-DB-70-H	2.13 x 2.0	7.0 x 6.6	8.59	18.94
	CL-DB-10-H	3.05 x 2.0	10.0 x 6.6	10.49	23.35

CUPLOCK ACCESSORIES



TOP CUP



BOTTOM CUP



LEDGER BLADE



SPIGOT



Main Components of Kwik-lock Support System



Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Kwikstage Vertical	KS-VS-33-H	1.0	3.3	6.2	13.7
	KS-VS-66-H	2.0	6.6	11.7	25.8
	KS-VS-82-H	2.5	8.2	14.4	31.8
	KS-VS-98-H	3.0	9.8	17.2	38.0



Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Kwikstage Transom	KS-T-26-H	0.8	2.6	5.9	13.0
	KS-T-39-H	1.2	3.9	9.7	21.3
	KS-T-59-H	1.8	5.9	13.1	28.9



Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Kwikstage Ledger	KS-HL-39-H	1.2	3.9	5.5	12.2
	KS-HL-59-H	1.8	5.9	6.9	15.3
	KS-HL-79-H	2.4	7.9	8.8	19.5



Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Board Bracket	KS-BB-08-H	0.2	0.8	1.8	4.0
	KS-BB-17-H	0.5	1.7	4.8	10.6
	KS-BB-24-H	0.7	2.4	8.3	18.2



Product Name	Item Code	Size in Mtr.	Size in Feet	Weight in Kg	Weight in Lbs.
Kwikstage Brace	KS-DB-24-H	0.7*2.0	2.4*6.6	8.0	17.7
	KS-DB-46-H	1.4*2.0	4.6*6.6	8.8	19.5
	KS-DB-52-H	1.6*2.0	5.2*6.6	9.1	20.1
	KS-DB-89-H	2.0*2.0	8.9*6.6	10.1	22.2
	KS-DB-98-H	3.0*2.0	9.8*6.6	12.4	27.0



Product Name	Item Code	Weight in Kg	Weight in Lbs.
End Toe Board Bracket	KS-ETBB-13-W	1.3	2.86601

ACCESSORIES



V-PRESSING



GUIDING PIN



U-CLIP



WEDGE/PIN

Ladders, Brackets, Gates & Accessories




Ladder


Item Code	Length in Mtr.	Length in feet	Weight in Kg	Weight in Lbs
SS-L-L3-H	0.9	3	5.0	11.0
SS-L-L5-H	1.5	5	7.9	17.34

Heavy Duty Ladder

Item Code	Length in Mtr.	Length in feet	Weight in Kg	Weight in Lbs
SS-HL-L3-H	0.9	3	7.0	15.33
SS-HL-L3-H	3.0	10	20.0	44.88



Product Name	Item Code	Description	Min. Extension		Max. Extension	
			Inch.	Mtr.	Inch.	Mtr.
Expandable Gate	SS-EG-2434	Gate Expandable 25" to 34"	25.20	0.640	31.9	0.81

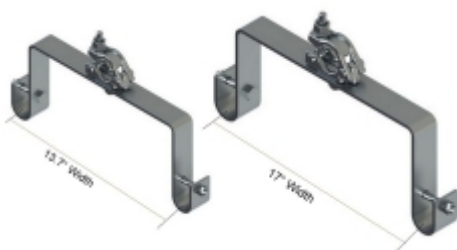


Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Ladder Bracket	SS-LB-13-H	0.3	13.7	2.9	6.40
Ladder Bracket	SS-LB-17-H	0.4	17	3.1	6.83

Twist Lock



SS-TWL-BP

Twist Lock Base Plate



Product Name	Item Code	Length in Mtr.	Length in Feet	Weight in Kg	Weight in Lbs.
Twist Lock/ Tube Lock	SS-TWL-20-H	0.6	2.0	2.5	5.6
	SS-TWL-30-H	0.9	3.0	3.3	7.3
	SS-TWL-40-H	1.2	4.0	4.3	9.1
	SS-TWL-50-H	1.5	5.0	4.9	10.8
	SS-TWL-60-H	1.8	6.0	5.7	12.6
	SS-TWL-80-H	2.4	8.0	7.3	16.1
	SS-TWL-100-H	3.0	10.0	8.9	19.6
	SS-TWL-130-H	3.96	13.0	11.24	24.8
	SS-TWL-160-H	4.87	16.0	13.65	30.1

Screw Base Jacks



SBJ-HJ

Hollow Screw Jack

Thread : 4TPI
 Tube OD : 32, 34, 38 mm
 Length in mm : 400, 500, 600, 700, 800
 Plate Size : 150*150*5, 150*150*6mm
 Jack Nut : Casted and Forged



SBJ-SJ

Solid Screw Jack

Thread : 4TPI
 Tube OD : 32, 34, 38 mm
 Length in mm : 400, 500, 600, 700
 Plate Size : 150*150*5mm
 Jack Nut : Casted and Forged



SBJ-SWJ

Swivel Screw Jack

Thread : 4TPI
 Tube OD : 32, 34, 38 mm
 Length in mm : 400, 500, 600, 700, 800
 Plate Size : 150*150*5mm
 Jack Nut : Casted and Forged



SBJ-UHJ

U-Head Screw Jack

Thread : 4TPI
 Tube OD : 32, 34, 38 mm
 Length in mm : 400, 500, 600, 700, 800
 Plate Size : 150*100*75*5,
 115*100*50*5mm
 Jack Nut : Casted and Forged



SBJ-FHJ

Fork Head Screw Jack

Thread : 4TPI
 Thread OD : 32, 34, 38 mm
 Length in mm : 400, 500, 600, 700, 800
 Jack Nut : Casted and Forged



SBI-UJ

Universal Screw Jack

Thread : 4TPI
 Tube OD : 32, 34, 38 mm
 Length in mm : 400, 500, 600, 700, 800
 Jack Nut : Casted and Forged



SBJ-UHP

U-HEAD PLATE



SBJ-BP

BASE PLATE



SBJ-CW

CASTER WHEEL 6" & 8"

Walk Boards & Steel Plank



SS-ASP

American type Steel Plank

Size (mm) : 914, 1219, 1524,
1828, 2133, 3042

Size (feet) : 3.0, 4.0, 5.0, 6.0, 7.0, 10



SS-ATSP

American type Steel Plank

Size (mm) : 1219, 1524, 1829, 2134,
2438, 3048

Size (feet) : 4.0, 5.0, 6.0, 7.0, 8.0, 10.0



SS-SRHP

Steel Raised Hook Plank

Size (mm) : 1219, 1524, 1829, 2134, 3048

Size (feet) : 4.0, 5.0, 6.0, 7.0, 10.0




SS-LSPWH

Light Duty Steel Plank without Head

Size (mm) : 1000, 1500, 2000, 2500, 3000,
4000

Size (feet) : 3.3, 5.0, 6.5, 8.2, 9.8, 13.1

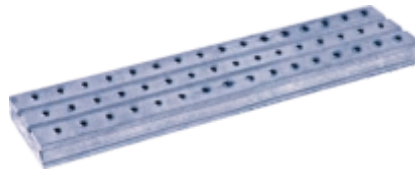


SS-SPWH

Steel Plank without Hook

Size (mm) : 735, 1250, 1810, 2420, 3075

Size (feet) : 2.4, 4.1, 6.0, 8.0, 10.0

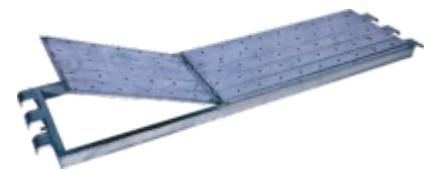

SS-APM

Aluminium Plank with Manhole

Size (mm) : 1800

Size (feet) : 6.0




SS-ITB

Interlocking Toe Board

Size (mm) : 609, 914, 1097, 1524, 1824,
2133, 2438, 3042

Size (feet) : 2.0, 3.0, 3.6, 5.0, 6.0, 7.0,
8.0, 10.0

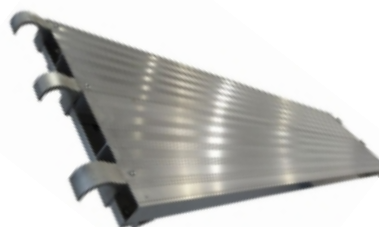


SS-AP

Aluminium Plank

Size (mm) : 2133, 3042

Size (feet) : 7.0, 10.0

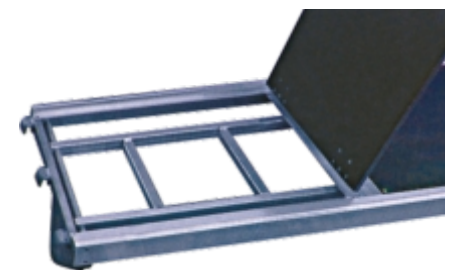

SS-PM

Plank with Manhole

Size (mm) : 2572, 3072

Size (feet) : 8.4, 10.0

Steel-Prop

The Post Shore is used for the shoring of slab formwork and for various other site needs. They are general used for building construction, Internal demolition and repair work.

Light Duty Prop

Product Description :
 Outer Tube : 56*1.8 mm
 Inner Tube : 48.3*1.8 mm
 Plate Size : 120*120*4 mm
 Material : S235, S355

Item Code	Length in Mtr.
SP-LDP-20-H	1.5-2.0m
SP-LDP-25-H	1.7-2.5m
SP-LDP-30-H	2.0-3.0m
SP-LDP-40-H	2.5-4.0m

Medium Duty Prop

Product Description :
 Outer Tube : 60*2.0 mm
 Inner Tube : 48.3*2.0 mm
 Plate Size : 120*120*5 mm
 Material : S235, S355

Item Code	Length in Mtr.
SP-MDP-20-H	1.5-2.0m
SP-MDP-25-H	1.7-2.5m
SP-MDP-30-H	2.0-3.0m
SP-MDP-40-H	2.5-4.0m

Heavy Duty Prop

Product Description :
 Outer Tube : 60*3.0 mm
 Inner Tube : 48.3*3.0 mm
 Plate Size : 120*120*5 mm
 Material : S235, S355

Item Code	Length in Mtr.
SP-HDP-20-H	1.5-2.0m
SP-HDP-25-H	1.7-2.5m
SP-HDP-30-H	2.0-3.0m
SP-HDP-40-H	2.5-4.0m



LIGHT DUTY PROP NUT



LIGHT DUTY PROP SLEEVE



PROP NUT COVER



G TYPE LOCKING PIN



LOCKING PIN WITH CHAIN



TRIPOD



FORK HEAD



PROP NUT



FLOWER BASE PLATE



BASE PLATE



PROP SLEEVE



Forged & Pressed Couplers



- Couplers manufactured to give performance.
- Finishes available : Electro Galvanization/ Yellow Passivation/ Hot Dip Galvanization.



DFC-BS-RAC

British Type Right Angle Coupler
Standard : EN-74 / BS-1139



DFC-BS-SWC

British Type Swivel Coupler
Standard : EN-74 / BS-1139



DFC-AS-RAC

American Type Swivel Coupler
Standard : EN-74 / BS-1139



DFC-AS-SWC

American Type Right Angle Coupler
Standard : EN-74 / BS-1139



DFC-GC-RAC

German Type Right Angle Coupler
Standard : EN-74 / BS-1139



DFC-GC-SWC

German Type Swivel Coupler
Standard : EN-74 / BS-1139



DFC-C-SWC

Combination Swivel Coupler
Standard : EN-74 / BS-1139



DFC-C-RAC

Combination Right Angle Coupler
Standard : EN-74 / BS-1139



DFC-BS-GLC

Grave Lock Coupler
Standard : EN-74 / BS-1139



DFC-BS-PC

Putlog Coupler
Standard : EN-74 / BS-1139



DFC-BS-SC

Single Coupler
Standard : EN-74 / BS-1139



DFC-BS-JP

Forged Joint Pin
Standard : EN-74 / BS-1139



PC-BS-RAC

British Type Pressed Right Angle Coupler
Standard : EN-74 / BS-1139



PC-BS-SWC

British Type Pressed Swivel Coupler
Standard : EN-74 / BS-1139



PC-BS-SLC

Sleeve Coupler
Standard : EN-74 / BS-1139



PS-BS-BRC

BRC Coupler
Standard : EN-74 / BS-1139

Formwork Accessories



FA-WC
Wedge Clamp
Size : 8 mm, 10 mm



FA-PRC
Pressed Rapid Clamp
Size : 8 mm, 10 mm



FA-WP
Waller Plate
Size (mm): 120*120*6,
120*120*8



FA-TR
TieRod
Dia : 15/17 mm
Length (Mtr.) : 0.5, 1.0, 1.5,
2.0, 2.5, 3.0
Weight : 1.5 Kg per Mtr.



FA-WS
Water Stopper
Thread Size : 15/17 mm



FA-HN
Hexa Nut
Length : 50, 120mm
Thread Size: 15/17, 21/23mm
Material Grade : S235, S355



FA-WN
**Forged & Casted Wing Nut
Two Legs**
Thread Size : 15/17 mm



FA-WN-2
**Forged & Casted Two Wing
Anchor Nut 100mm**
Thread Size : 15/17 mm,
21/23mm



FA-AN
Forged Anchor Nut 110 mm
Thread Size : 15/17mm,
21/23mm



FA-AN-3
**Forged & Cast Anchor
Nut 70mm**
Thread Size : 15/17 mm



FA-CPWH
Combination Plate with Nut
Thread Size : 15/17 mm



FA-GLP
Gravity Lock Pin



FA-CC
C-Clamp




FA-BL
Brace Lock



FA-PC
Panel Clamp




FA-PCWN
**Panel Clamp with
Tierod & Nut**

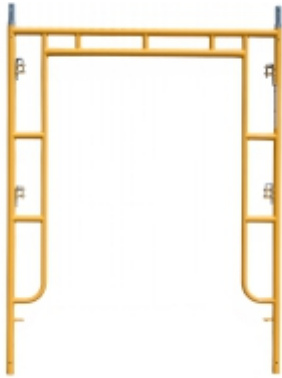

SS-FS-WTF

Walk Through Frame


Size (mm): 2006*1524, 1930*1524,
1219*1700, 1219*1930,
914* 1700

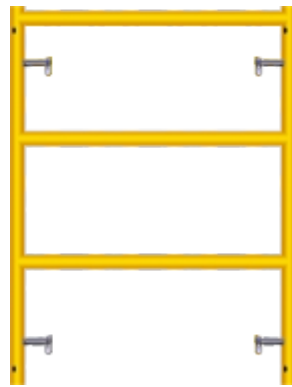

SS-FS-LF

Ladder Frame


Size (mm): 1828*762, 1524* 762,
914*762

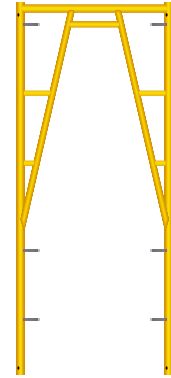

SS-FS-WTF-1

Walk Through Frame


Size (mm): 2006*1524, 1930*1524,
1219*1700, 1219*1930,
914*1700

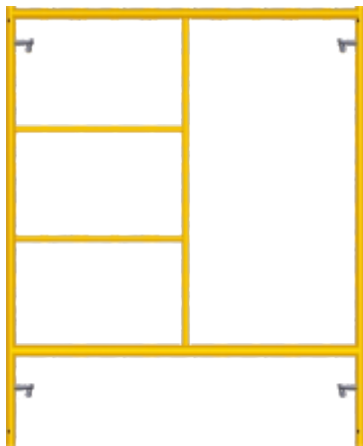

SS-FS-MFS

Mason Frame

Size (mm): 1930*1524 , 1524*1524
1220*1524, 914*1524

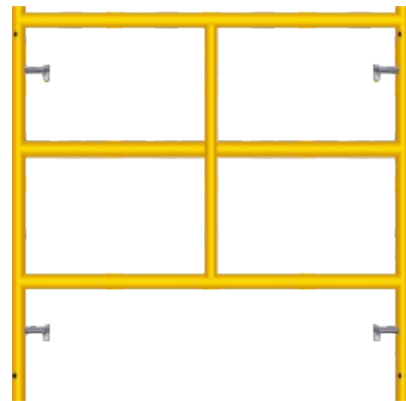

SS-FS-DLF

Double Ladder Frame

Size (mm): 1524*1524, 1524*1930



SS-FS-CB

Cross Brace

Size (mm): 1219*610, 1219*914,
1219*1219, 1524*610,
1829*610, 1829*1229
2133*1219, 2438*1219
3048*914, 3038*219



SS-FS-FGR

Frame Guard Rail

Size (mm): 914, 1219, 1524,
2133, 2438, 3048



Fectum Global Industries

Address : C147 Phase 5, Focal Point Ludhiana - 141010, Punjab, India

Tel: +91 161-4100347, +91 98881-66466

Email: vivekgupta@fectumglobal.com, Website: www.fectumglobal.com